



PRODUCT CATALOG

Residential and Commercial Equipment Mounting



Equipment Stands



Lineset Penetrations



VRF Stands







Mounting Blocks



Wall Brackets



TABLE OF CONTENTS

 IBEX Advantages	2
 Equipment Stands	3-6
• Powder Coated Steel	3-4
• Aluminum	5-6
 VRF Stands	7
 Wall Brackets	8
 Mounting Blocks	9
 Lineset Penetrations	9
 Warranty	10


IBEX's new line of equipment stands makes your installation easier with quick and simple assembly. Mount your HVAC units on our safe, sturdy stand that can support up to 500 lbs.

IBEX stands elevate your equipment off the ground to keep it away from damaging elements, such as:

- Resilient to landscaping
- Snow buildup
- Flooding





IBEX ADVANTAGES



IBEX HVAC manufactures premium HVAC equipment mounting solutions for residential and commercial applications. Our user-centric designs ensure simplified installation, minimizing on-site labor. We partner with HVAC contractors through wholesale distribution to deliver high-quality products nationwide, while fostering open communication to stay ahead of evolving industry needs.

Our commitment to material diversity ensures unparalleled stability and durability for your mounted equipment. We offer both lightweight aluminum and robust powder-coated steel stands to cater to your specific project requirements. Furthermore, IBEX stands can be customized to perfectly integrate with your unique design preferences, ensuring optimal functionality and a seamless aesthetic.

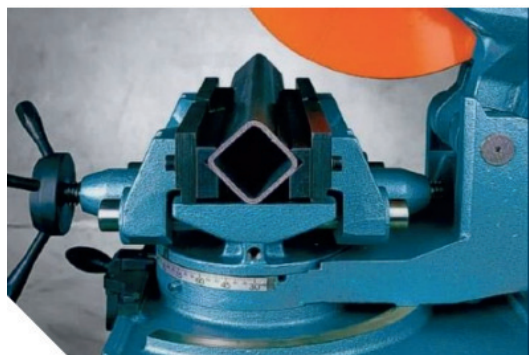

IBEX stands are meticulously engineered designs overseen by industry experts, guaranteeing compliance with the quality control protocols. This commitment to excellence extends to the thoughtful packaging, where all hardware undergoes pre-assembly with hand-tightening for effortless field installation. Confidently complete stand assembly in under 10 minutes, maximizing on-site labor efficiency.

Powder Coated Steel Stands

Benefits of powder coated steel

- Powder-coated steel undergoes a multi-step process for superior finish and longevity, including water rinsing, oil removal, passivation, drying, and oven curing.
- 20% more weight capacity
- Industry leading 1 in tube diameter adding strength and stability.

When you should use powder coated steel stands:

- Strength and load-bearing capacity
- Help protect costly equipment
- Meet code requirements



Powder Coated Steel Stands

- Stands to fit any application
- Vibration isolation pads included

- Adjustable width
- 500 lbs capacity



PRODUCT	DIMENSIONS
1201	H:12"L:35"W:20"
1801	H:18"L:35"W:20"
2401	H:24"L:35"W:20"




PRODUCT	DIMENSIONS
1202	H:12"L:35"W:24"
1802	H:18"L:35"W:24"
2402	H:24"L:35"W:24"




PRODUCT	DIMENSIONS
1204	H:12"L:38"W:36"
1804	H:18"L:38"W:36"
2404	H:24"L:38"W:36"

When to use them:




Single fan ductless outdoor units

-  IBEX 1201
-  IBEX 1801
-  IBEX 2401



Dual fan (tall) ductless outdoor units

-  IBEX 1202
-  IBEX 1802
-  IBEX 2402



Custom VRF Wide applications, AC Condensing unit

-  IBEX 1204
-  IBEX 1804
-  IBEX 2404

Aluminum Stands

Benefits of Aluminum

- Lightweight
- Rust resistant
- Sleek and modern appearance
- Unpainted, marine grade aluminum

When you should use Aluminum stands:

- Harsh environmental conditions
- Rooftop applications
- Coastal installations



Aluminum Stands

- Stands to fit any application
- Vibration isolation pads included



PRODUCT	DIMENSIONS
1201AL	H:12"L:35"W:20"
1801AL	H:18"L:35"W:20"
2401AL	H:24"L:35"W:20"

- Adjustable width
- 400 lbs capacity




PRODUCT	DIMENSIONS
1202AL	H:12"L:35"W:24"
1802AL	H:18"L:35"W:24"
2402AL	H:24"L:35"W:24"




PRODUCT	DIMENSIONS
1204AL	H:12"L:38"W:36"
1804AL	H:18"L:38"W:36"
2404AL	H:24"L:38"W:36"

When to use them:




Single fan ductless outdoor units

- IBEX 1201
- IBEX 1801
- IBEX 2401



Dual fan (tall) ductless outdoor units

- IBEX 1202
- IBEX 1802
- IBEX 2402



Custom VRF Wide applications, AC Condensing unit

- IBEX 1204
- IBEX 1804
- IBEX 2404

When to use them



Single fan ductless outdoor units

- IBEX 1201
- IBEX 1801
- IBEX 2401



Dual fan (tall) ductless outdoor units

- IBEX 1202
- IBEX 1802
- IBEX 2402



Wide applications, AC Condensing unit

- IBEX 1204
- IBEX 1804
- IBEX 2404

VRF Stands

IBEX specializes in constructing commercial stands tailored for various rooftop applications. For a quote, please provide the following information:

- Job name and location
- Spec sheets of the equipment
- Quantity of equipment
- Layout of the equipment
- Roof material

With these details in hand, we can design and provide a quote for a stand system tailored to your commercial project. Please send this information via email to sales@ibexhvac.com, and we'll promptly get to work on it.



Wall Brackets



PRODUCT	DIMENSIONS
ACB-30"	L:30"H:1.6"D:24"
ACB-36"	L:36"H:1.6"D:27"
ACB-42"	L:42"H:1.6"D:33"
ACB-48"	L:48"H:1.6"D:39"

- Made from 3mm thick powder coated steel.
- Max weight 400 lbs
- Variable height configuration facilitates under-unit service access.
- Powder-coated steel undergoes a multi-step process: water rinsing, oil removal, passivation, drying, and oven curing.



PRODUCT	DIMENSIONS
WB300	L:34"H:18"D:23"
WB500	L:34"H:18"D:24"

- Vibration isolation pads included
- Built-in level
- Mounting hardware included
- Sliding, adjustable width supports
- Variable height configuration facilitates under-unit service access.
- Powder-coated steel undergoes a multi-step process: water rinsing, oil removal, passivation, drying, and oven curing.

WB300 – max weight 300 lbs

WB500 – max weight 500 lbs

Mounting Blocks



Mounting blocks offer a robust foundation for HVAC components, ensuring secure fastening, minimizing vibrations, and reducing noise for enhanced stability.

PRODUCT	DIMENSIONS
MB01	H:4"L:10"W:7" Channel: 0.83"
MB02	H:4"L:10"W:7" Channel: 1.6"



PRODUCT	DIMENSIONS
LP125	H:5"W:5"H:17"
LP250	H:10"W:5"H:17"

Lineset Penetrations

The roof inlet adapter provides an effective solution to weatherproofing linesets penetrating flat roofs. It features inlet base holes for a stable installation, and accommodates different roof surface types.

WARRANTY



STAND WARRANTY

To the original owner of an IBEX stand, IBEX HVAC, Inc. warrants the base to be free of defects in materials and workmanship for 2 years under the equipment under which it was originally installed so long as the installing homeowner lives there. End user shall provide a copy of receipt showing date of installation.




This warranty does not cover replacement labor cost, or any cost claim incident to the defect, replacement, or reinstallation, nor field repair expenses. This warranty gives you specific legal rights and you may also have other rights, which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation of exclusion may not apply to you.

EXCLUSIONS AND LIMITATIONS

IBEX HVAC, Inc. equipment stands are designed and manufactured to be used as bases for light, ground supported equipment such as air conditioning condensers, swimming pool filters and heat pumps. Use of IBEX HVAC Inc. stands for purposes other than those listed above, or improper installation of IBEX HVAC Inc stands may result in stand failure. IBEX HVAC, Inc disclaims any liability due to such misuse or improper installation



Contact Us

 www.ibexhvac.com
 201-683-7715
 info@ibexhvac.com

